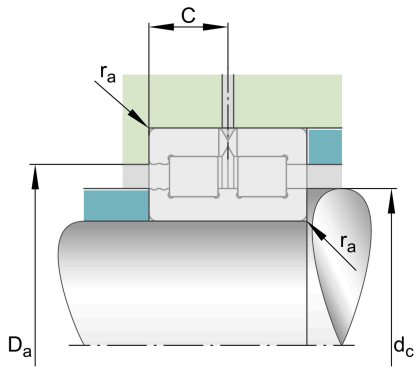
**SL014930**

Cylindrical roller bearing

Schaeffler Kimliği:
0001217200000

Cylindrical roller bearings SL0149, locating bearing, double row, full complement cylindrical roller set, dimension series 49

Teknik bilgiler

**Dimensions**

r_{\min}	2 mm	Minimum chamfer dimension
d_1	171,8 mm	Maximum rib diameter inner ring
$D_{1\min}$	187,2 mm	Minimum rib diameter outer ring
$d_{c\min}$	171,5 mm	Minimum shaft shoulder
C	30 mm	Distance to lubrication hole
	6,35 kg	Ağırlık

Main Dimensions & Performance Data

d	150 mm	Bore diameter
D	210 mm	Outside diameter
B	60 mm	Width
C_r	410.000 N	Basic dynamic load rating, radial
C_{0r}	820.000 N	Basic static load rating, radial
C_{ur}	105.000 N	Fatigue load limit, radial
n_G	1.790 1/min	Limiting speed
n_{gr}	1.200 1/min	Reference speed

Mounting dimensions

$r_{a\max}$	2 mm	Maximum recess radius
$d_{a\min}$	171,8 mm	Minimum diameter shaft shoulder
$D_{a\max}$	187,5 mm	Maximum diameter of housing shoulder

Additional information

NNC4930V	Bearing designation DIN5412
----------	-----------------------------

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.