


SL192305-XL

Cylindrical roller bearing

Schaeffler Kimliği:

#{ctx.productData.sapMaterialNumber}

Teknik bilgiler

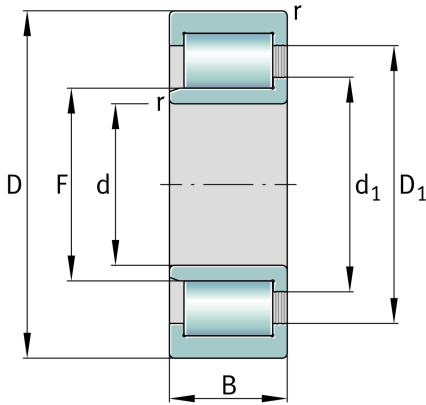

Dimensions

D_1	47,5 mm	Shoulder diameter outer ring
$D_{a \max}$	47,5 mm	Maximum diameter of housing shoulder
d_1	36,7 mm	Shoulder diameter inner ring
$d_{a \min}$	31,5 mm	Minimum diameter shaft shoulder
$d_{c \min}$	36,5 mm	Minimum shaft shoulder
F	31,7 mm	Raceway diameter inner ring
$r_{a \max}$	1,1 mm	Maximum fillet radius
r_{\min}	1,1 mm	Minimum chamfer dimension
s	2 mm	Axial displacement
	0 kg	Ağırlık

Main Dimensions & Performance Data

d	25 mm	Bore diameter
D	62 mm	Outside diameter
B	24 mm	Width
C_r	73.000 N	Basic dynamic load rating, radial
C_{0r}	59.000 N	Basic static load rating, radial
C_{ur}	9.600 N	Fatigue load limit, radial
n_G	9.300 1/min	Limiting speed
n_{gr}	4.800 1/min	Reference speed