


## SL192307-XL

Cylindrical roller bearing

Schaeffler Kimliği:

#{ctx.productData.sapMaterialNumber}

### Teknik bilgiler

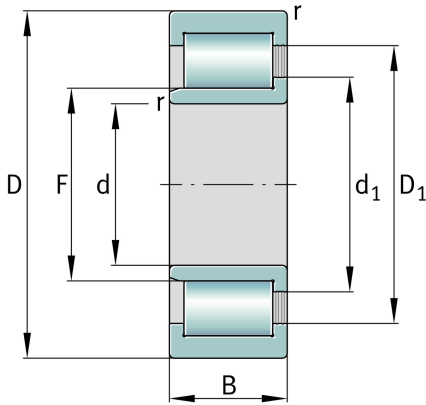

### Dimensions

$D_1$	65,8 mm	Shoulder diameter outer ring
$D_{a\ max}$	65,5 mm	Maximum diameter of housing shoulder
$d_1$	50,7 mm	Shoulder diameter inner ring
$d_{a\ min}$	44,5 mm	Minimum diameter shaft shoulder
$d_{c\ min}$	50,5 mm	Minimum shaft shoulder
F	44,7 mm	Raceway diameter inner ring
$r_{a\ max}$	1,5 mm	Maximum fillet radius
$r_{min}$	1,5 mm	Minimum chamfer dimension
s	2 mm	Axial displacement
	0 kg	Ağırlık

### Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	31 mm	Width
$C_r$	126.000 N	Basic dynamic load rating, radial
$C_{0r}$	110.000 N	Basic static load rating, radial
$C_{ur}$	20.500 N	Fatigue load limit, radial
$n_G$	5.800 1/min	Limiting speed
$n_{gr}$	3.600 1/min	Reference speed