


SL192308-XL

Cylindrical roller bearing

Schaeffler Kimliği:

#{ctx.productData.sapMaterialNumber}

Teknik bilgiler

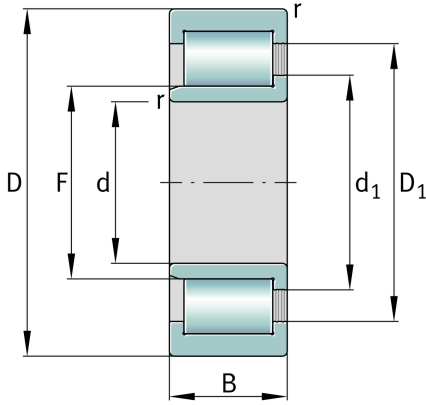

Dimensions

D_1	75,2 mm	Shoulder diameter outer ring
$D_{a\ max}$	75 mm	Maximum diameter of housing shoulder
d_1	57,5 mm	Shoulder diameter inner ring
$d_{a\ min}$	51 mm	Minimum diameter shaft shoulder
$d_{c\ min}$	57,5 mm	Minimum shaft shoulder
F	51,1 mm	Raceway diameter inner ring
$r_{a\ max}$	1,5 mm	Maximum fillet radius
r_{min}	1,5 mm	Minimum chamfer dimension
s	2 mm	Axial displacement
	0 kg	Ağırlık

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	33 mm	Width
C_r	170.000 N	Basic dynamic load rating, radial
C_{0r}	153.000 N	Basic static load rating, radial
C_{ur}	29.000 N	Fatigue load limit, radial
n_G	5.000 1/min	Limiting speed
n_{gr}	3.050 1/min	Reference speed