


SL192310-XL

Cylindrical roller bearing

Schaeffler Kimliği:

#{ctx.productData.sapMaterialNumber}

Teknik bilgiler

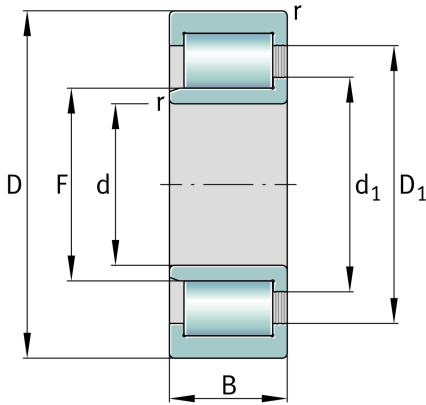

Dimensions

D_1	89,7 mm	Shoulder diameter outer ring
$D_{a \max}$	89,5 mm	Maximum diameter of housing shoulder
d_1	68,3 mm	Shoulder diameter inner ring
$d_{a \min}$	60,5 mm	Minimum diameter shaft shoulder
$d_{c \min}$	68 mm	Minimum shaft shoulder
F	60,7 mm	Raceway diameter inner ring
$r_{a \max}$	2 mm	Maximum fillet radius
r_{\min}	2 mm	Minimum chamfer dimension
s	3 mm	Axial displacement
	0 kg	Ağırlık

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	110 mm	Outside diameter
B	40 mm	Width
C_r	232.000 N	Basic dynamic load rating, radial
C_{0r}	215.000 N	Basic static load rating, radial
C_{ur}	41.000 N	Fatigue load limit, radial
n_G	4.200 1/min	Limiting speed
n_{gr}	2.800 1/min	Reference speed