

NX15-XL

Needle roller/axial ball bearing



Schaeffler Kimliği:
0507785790000

Needle roller/axial ball bearings NX,
single direction axial component, for oil
lubrication

X-life

Teknik bilgiler

2)

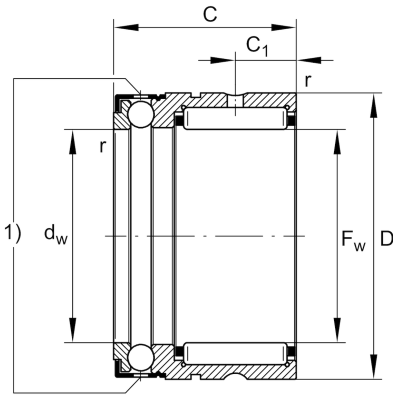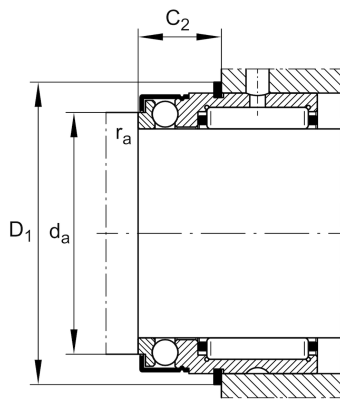

Dimensions

C_1	8 mm	Distance to lubrication hole
C_2	8 mm	Distance to lubrication hole
d_w	15 mm	Bore diameter of shaft washer
r_{min}	0,3 mm	Minimum chamfer dimension
	51,41 g	Ağırlık

Main Dimensions & Performance Data

F_w	15 mm	Bore diameter
D	24 mm	Outside diameter
C	28 mm	Height
C_r	12.100 N	Basic dynamic load rating, radial
C_{0r}	12.700 N	Basic static load rating, radial
C_a	5.600 N	Basic dynamic load rating, axial
C_{0a}	10.400 N	Basic static load rating, axial
C_{ur}	2.360 N	Fatigue load limit, radial
C_{ua}	475 N	Fatigue load limit, axial
n_G	8.000 1/min	Limiting speed

Mounting dimensions

d_a	19 mm	Mounting dimension shaft shoulder
$r_{a max}$	0,3 mm	Maximum recess radius
D_1	26,5 mm	Connection diameter snap ring
C_2	12,2 mm	Connection width with snap ring

Additional information

IR12X15X16-XL	Suitable inner rings IR
WR24, SW24	Snap ring

Temperature range		
T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.