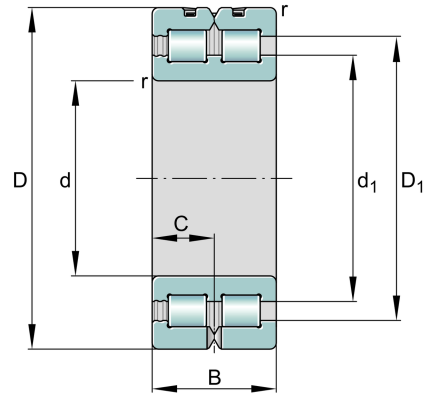
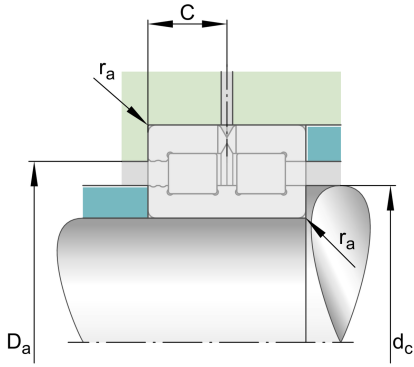
**SL014834****Cylindrical roller bearing**

Schaeffler Kimliği:
0017343850000

Cylindrical roller bearings, locating bearing,
double row, full complement cylindrical
roller set, dimension series 48

Teknik bilgiler**Dimensions**

$r_{\min}$	1,1 mm	Minimum chamfer dimension
d_1	186,3 mm	Maximum rib diameter inner ring
$D_{1\min}$	197 mm	Minimum rib diameter outer ring
$d_{c\min}$	186 mm	Minimum shaft shoulder
C	22,5 mm	Distance to lubrication hole
	3,832 kg	Ağırlık

Main Dimensions & Performance Data

d	170 mm	Bore diameter
D	215 mm	Outside diameter
B	45 mm	Width
C_r	260.000 N	Basic dynamic load rating, radial
C_{0r}	600.000 N	Basic static load rating, radial
C_{ur}	70.000 N	Fatigue load limit, radial
n_G	1.670 1/min	Limiting speed
n_{gr}	1.180 1/min	Reference speed

Mounting dimensions

$r_{a\max}$	1,1 mm	Maximum recess radius
$d_{a\min}$	186,3 mm	Minimum diameter shaft shoulder
$D_{a\max}$	197 mm	Maximum diameter of housing shoulder

Additional information

NNC4834V	Bearing designation DIN5412
----------	-----------------------------

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.