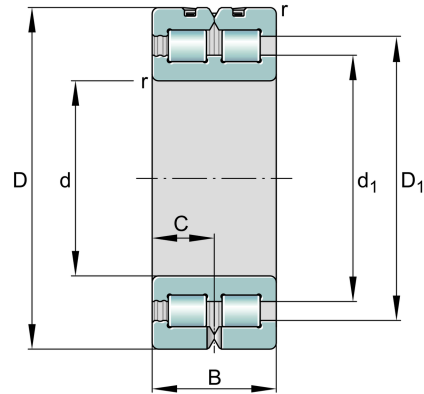
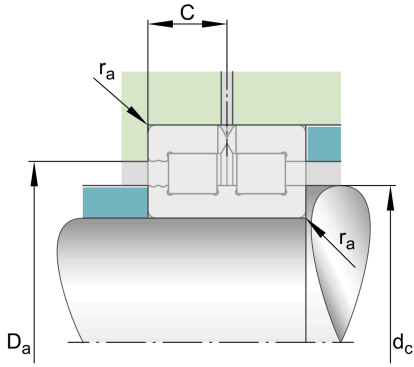
**SL014844****Cylindrical roller bearing**

Schaeffler Kimliği:
0001649680000

Cylindrical roller bearings, locating bearing,
double row, full complement cylindrical
roller set, dimension series 48

Teknik bilgiler**Dimensions**

$r_{\min}$	1,5 mm	Minimum chamfer dimension
d_1	239,1 mm	Maximum rib diameter inner ring
$D_{1\min}$	165,1 mm	Minimum rib diameter outer ring
$d_{c\min}$	239 mm	Minimum shaft shoulder
C	25 mm	Distance to lubrication hole
	5,972 kg	Ağırlık

Main Dimensions & Performance Data

d	220 mm	Bore diameter
D	270 mm	Outside diameter
B	50 mm	Width
C_r	335.000 N	Basic dynamic load rating, radial
C_{0r}	840.000 N	Basic static load rating, radial
C_{ur}	92.000 N	Fatigue load limit, radial
n_G	1.290 1/min	Limiting speed
n_{gr}	850 1/min	Reference speed

Mounting dimensions

$r_{a\max}$	1,5 mm	Maximum recess radius
$d_{a\min}$	239,1 mm	Minimum diameter shaft shoulder
$D_{a\max}$	252,5 mm	Maximum diameter of housing shoulder

Additional information

NNC4844V	Bearing designation DIN5412
----------	-----------------------------

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.